


This drawing, specifications, and concepts contained here in are the sole property of Red Barn Machine, and may not be reproduced or used in any fashion without the prior written permission of Red Barn Machine.

REVISONS			
REV	DESCRIPTION	DATE	INITIAL APPROVED

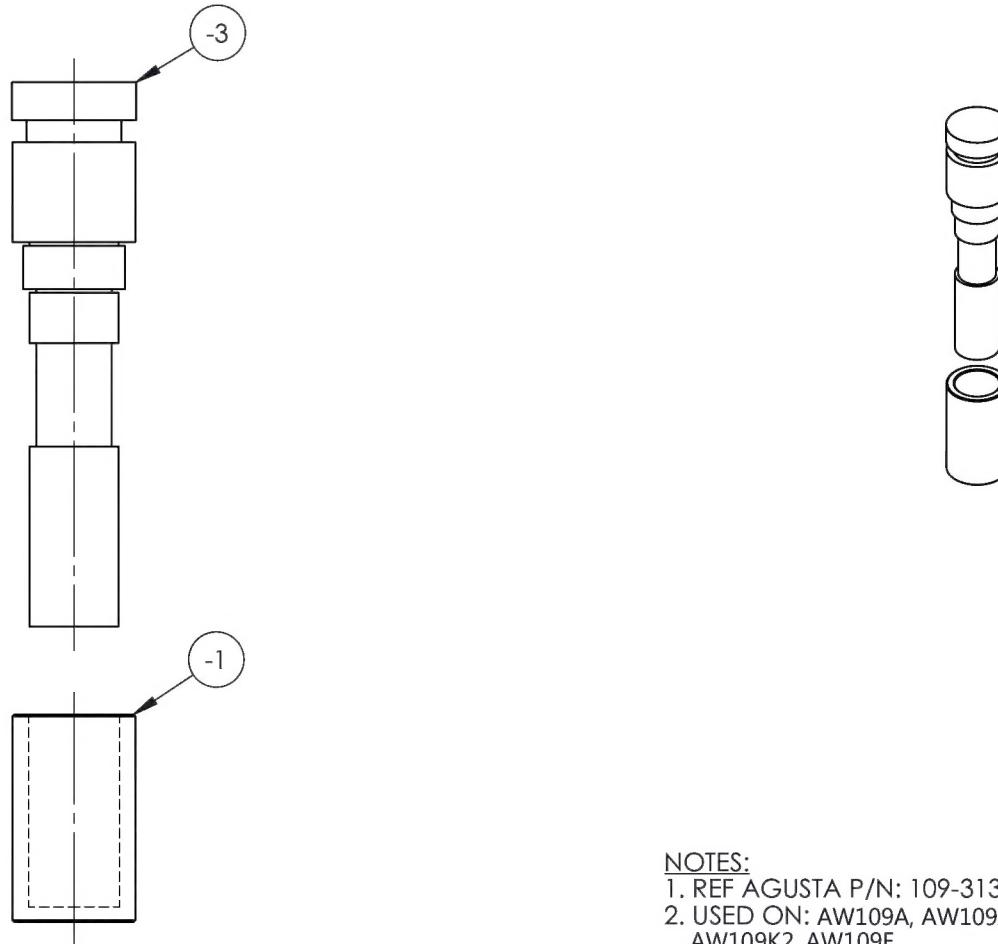

NOTES:




1. REF AGUSTA P/N: 109-3130-34-1.
2. USED ON: AW109A, AW109A11, AW109C, AW109K2, AW109E.

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
			-1	1	CYLINDER	6061	Ø2-5/8 X 4-1/2	2
			-3	1	ROD	6061	Ø2-5/8 X 11-1/2	3

TITLE		RED BARN MACHINE	
DWG NO.		RBW109-3130-34-1	REV
MATL	DRAWN BY:	MARPET	
UNLESS OTHERWISE SPECIFIED	APPROVED	D Weil	
DIMENSIONS ARE IN INCHES	HEAT		
.XXX ± .005	TREAT		
.XX ± .01	FINISH		
.X ± .1	SPEC		
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R	USED ON MODEL		
2. DIMENSIONAL LIMITS APPLY AFTER PLATING	SEE NOTE		
SCALE	1:4	DATE	5/20/2013
			SHEET 1 OF 3

This drawing, specifications, and concepts contained here in are the sole property of Red Barn Machine, and may not be reproduced or used in any fashion without the prior written permission of Red Barn Machine.




REVISIONS				
REV	DESCRIPTION	DATE	INITIAL	APPROVED

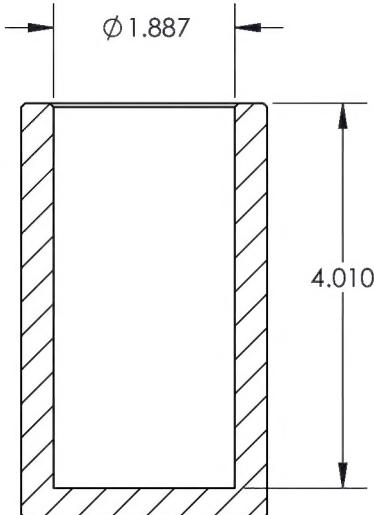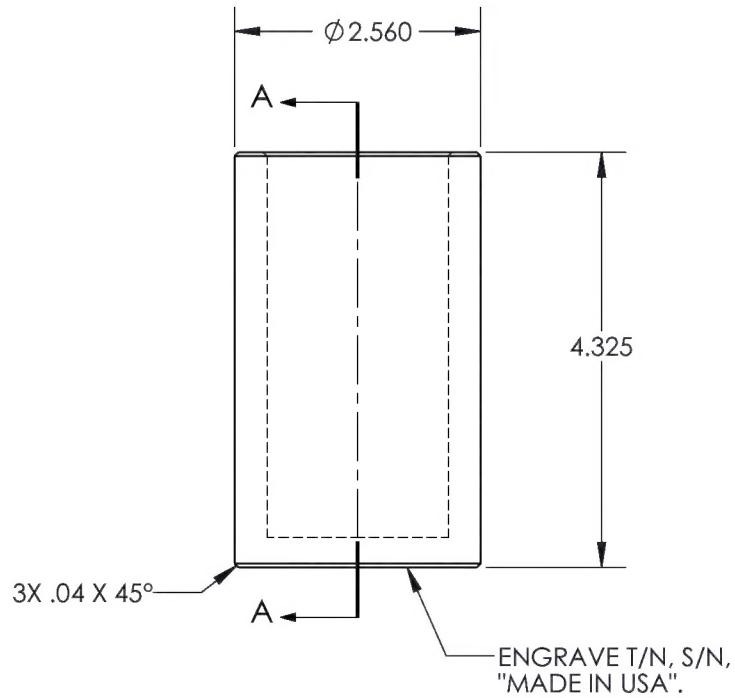

SECTION A-A

(-1)
CYLINDER

	RED BARN MACHINE	
TITLE		ADAPTER, T/R YOKE BUSHING INSTL.
DWG NO.	RBW109-3130-34-1-1	REV
MATL	6061	DRAWN BY: MARPET
UNLESS OTHERWISE SPECIFIED		APPROVED <i>D Weil</i>
DIMENSIONS ARE IN INCHES		
.XXX \pm .005	FRACTIONS \pm 1/32	HEAT
.XX \pm .01	ANGLES \pm 5°	TREAT
.X \pm .1		FINISH CLEAR ANODIZE
1. BREAK ALL SHARP EDGES .015 x 45°		SPEC MIL-A-8625F, TYPE II, CLASS I
OR .015R		USED ON MODEL
2. DIMENSIONAL LIMITS APPLY AFTER		SEE SHEET 1
PLATING		
SCALE	1:2	DATE 5/20/2013
		SHEET 2 OF 3

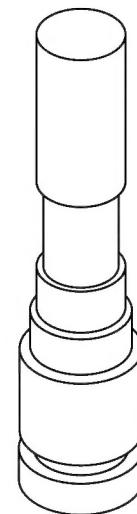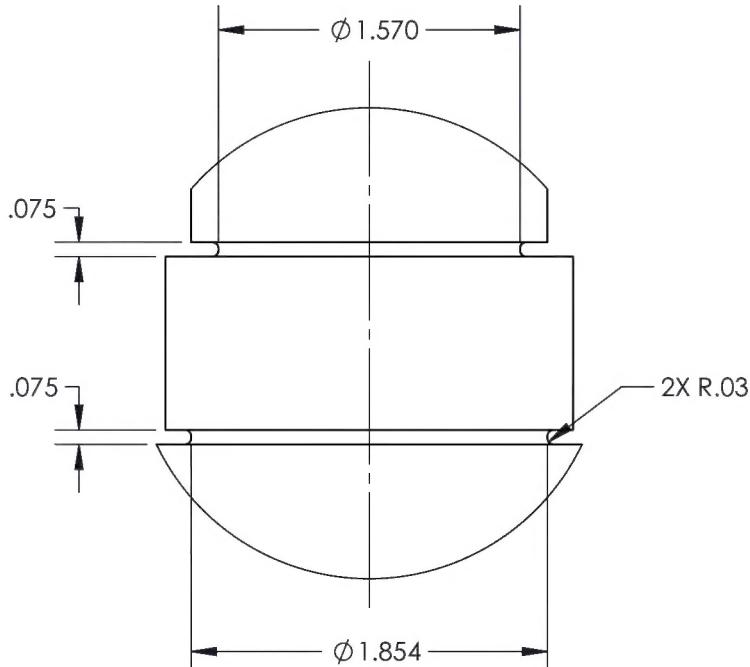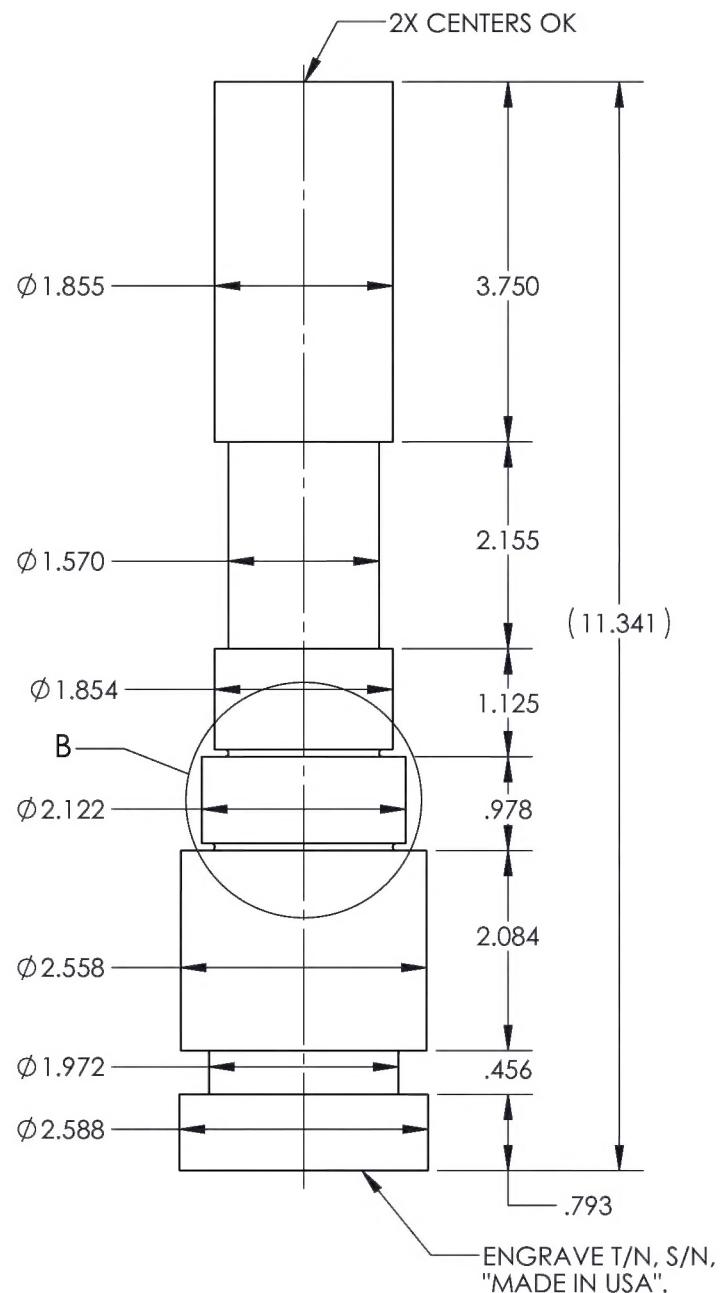

DETAIL B
SCALE 1 : 1

 RED BARN MACHINE	
TITLE	ADAPTER, T/R YOKE BUSHING INSTL.
DWG NO.	RBW109-3130-34-1-3
MATL	6061
UNLESS OTHERWISE SPECIFIED	DRAWN BY: MARPET
DIMENSIONS ARE IN INCHES	APPROVED <i>D. Weil</i>
.XXX ± .005	FRACTIONS ± 1/32
.XX ± .01	ANGLES ± .5°
.X ± .1	
1. BREAK ALL SHARP EDGES .015 x 45°	HEAT TREAT
OR .015R	FINISH CLEAR ANODIZE
2. DIMENSIONAL LIMITS APPLY AFTER	SPEC MIL-A-8625F, TYPE II, CLASS I
PLATING	USED ON MODEL
	AW109
SCALE	1:2
DATE	5/20/2013
SHEET 3 OF 3	